D:H0105
1 of 6

Fig. 1

0 9 0 5 4 0 3 6 0 - 0 0 2 0 2 0 0

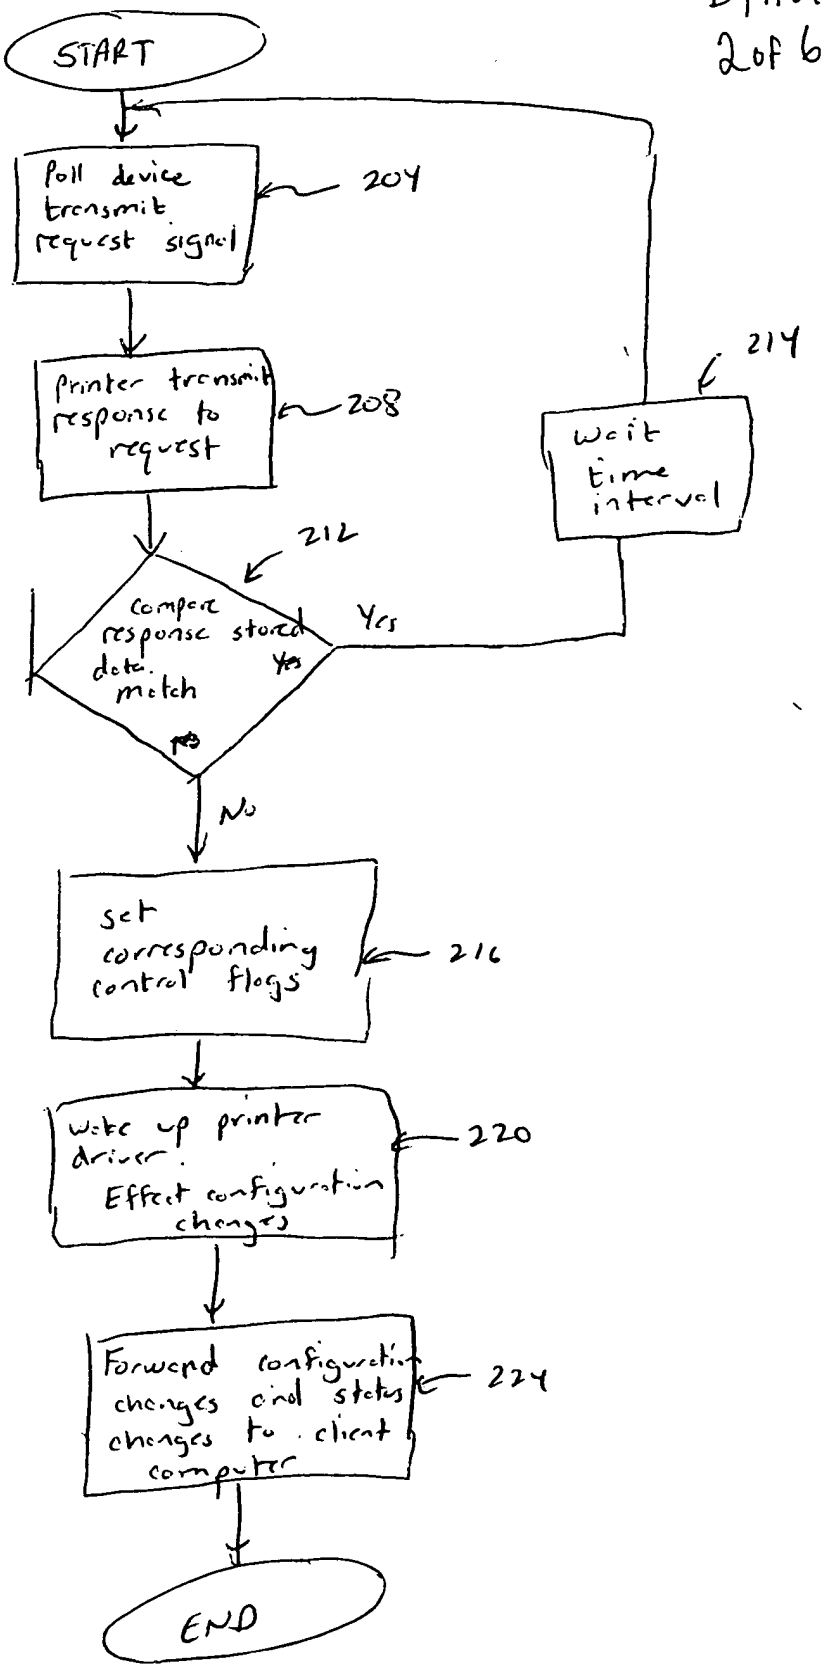
START
Poll device transmit request signal
204
Printer transmit response to request
208
Wait time interval
214
212
Compare response stored data. match
Yes
No
set corresponding control flags
216
Wake up printer driver. Effect configuration changes
220
Forward configuration changes and status changes to client computer
224
END

Fig 2

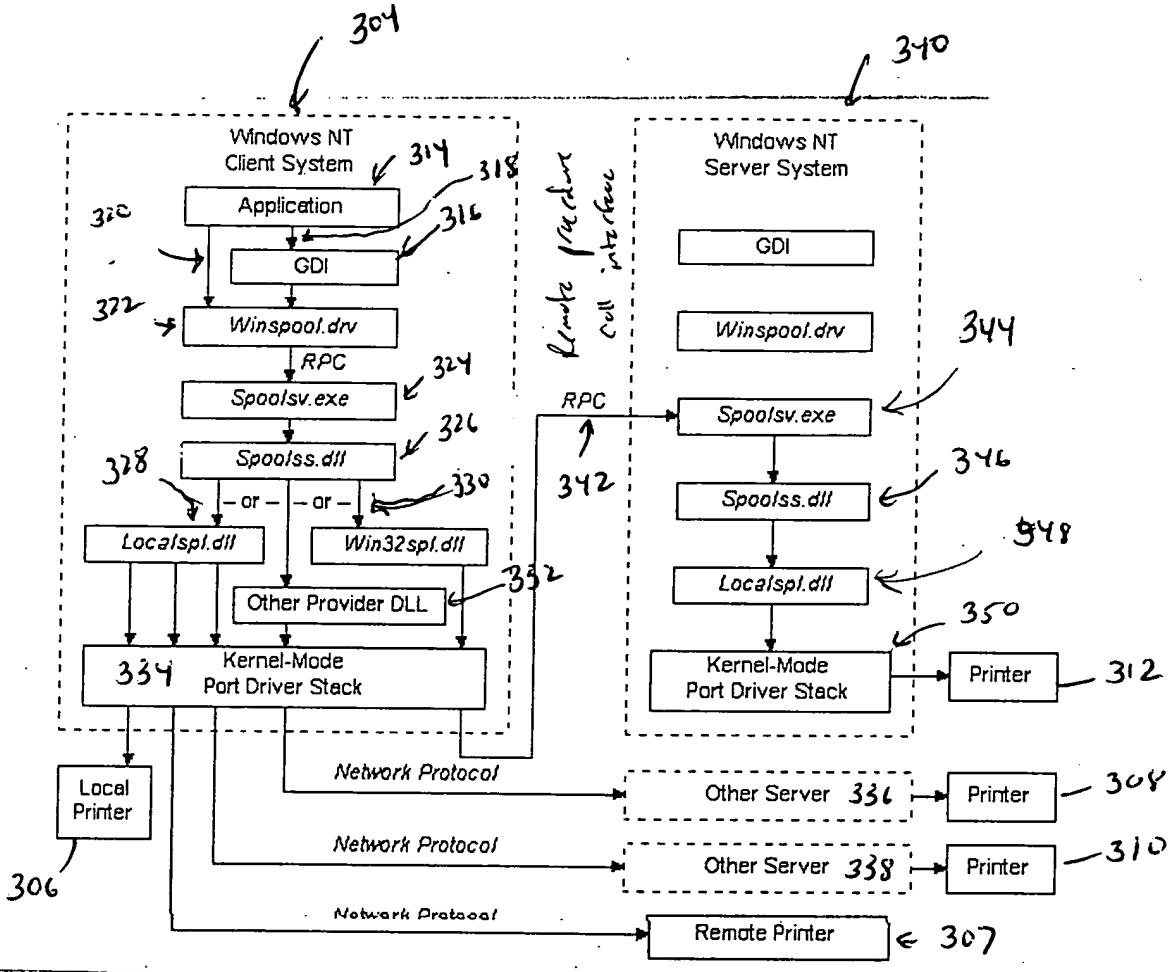
304
340
Windows NT
Client System
314
318
320
Application
316
GDI
322
Winspool.drv
RPC
324
Spoolsv.exe
326
Spoolss.dll
328
330
– or –
– or –
Localspl.dll
Win32spl.dll
Other Provider DLL
332
334
Kernel-Mode
Port Driver Stack
Local
Printer
306
Network Protocol
Network Protocol
Network Protocol
Remote procedure call interface
RPC
342
Windows NT
Server System
GDI
Winspool.drv
344
Spoolsv.exe
346
Spoolss.dll
348
Localspl.dll
350
Kernel-Mode
Port Driver Stack
Printer
312
Other Server 336
Printer
308
Other Server 338
Printer
310
Remote Printer
307

Fig 3

D2000 "6987960

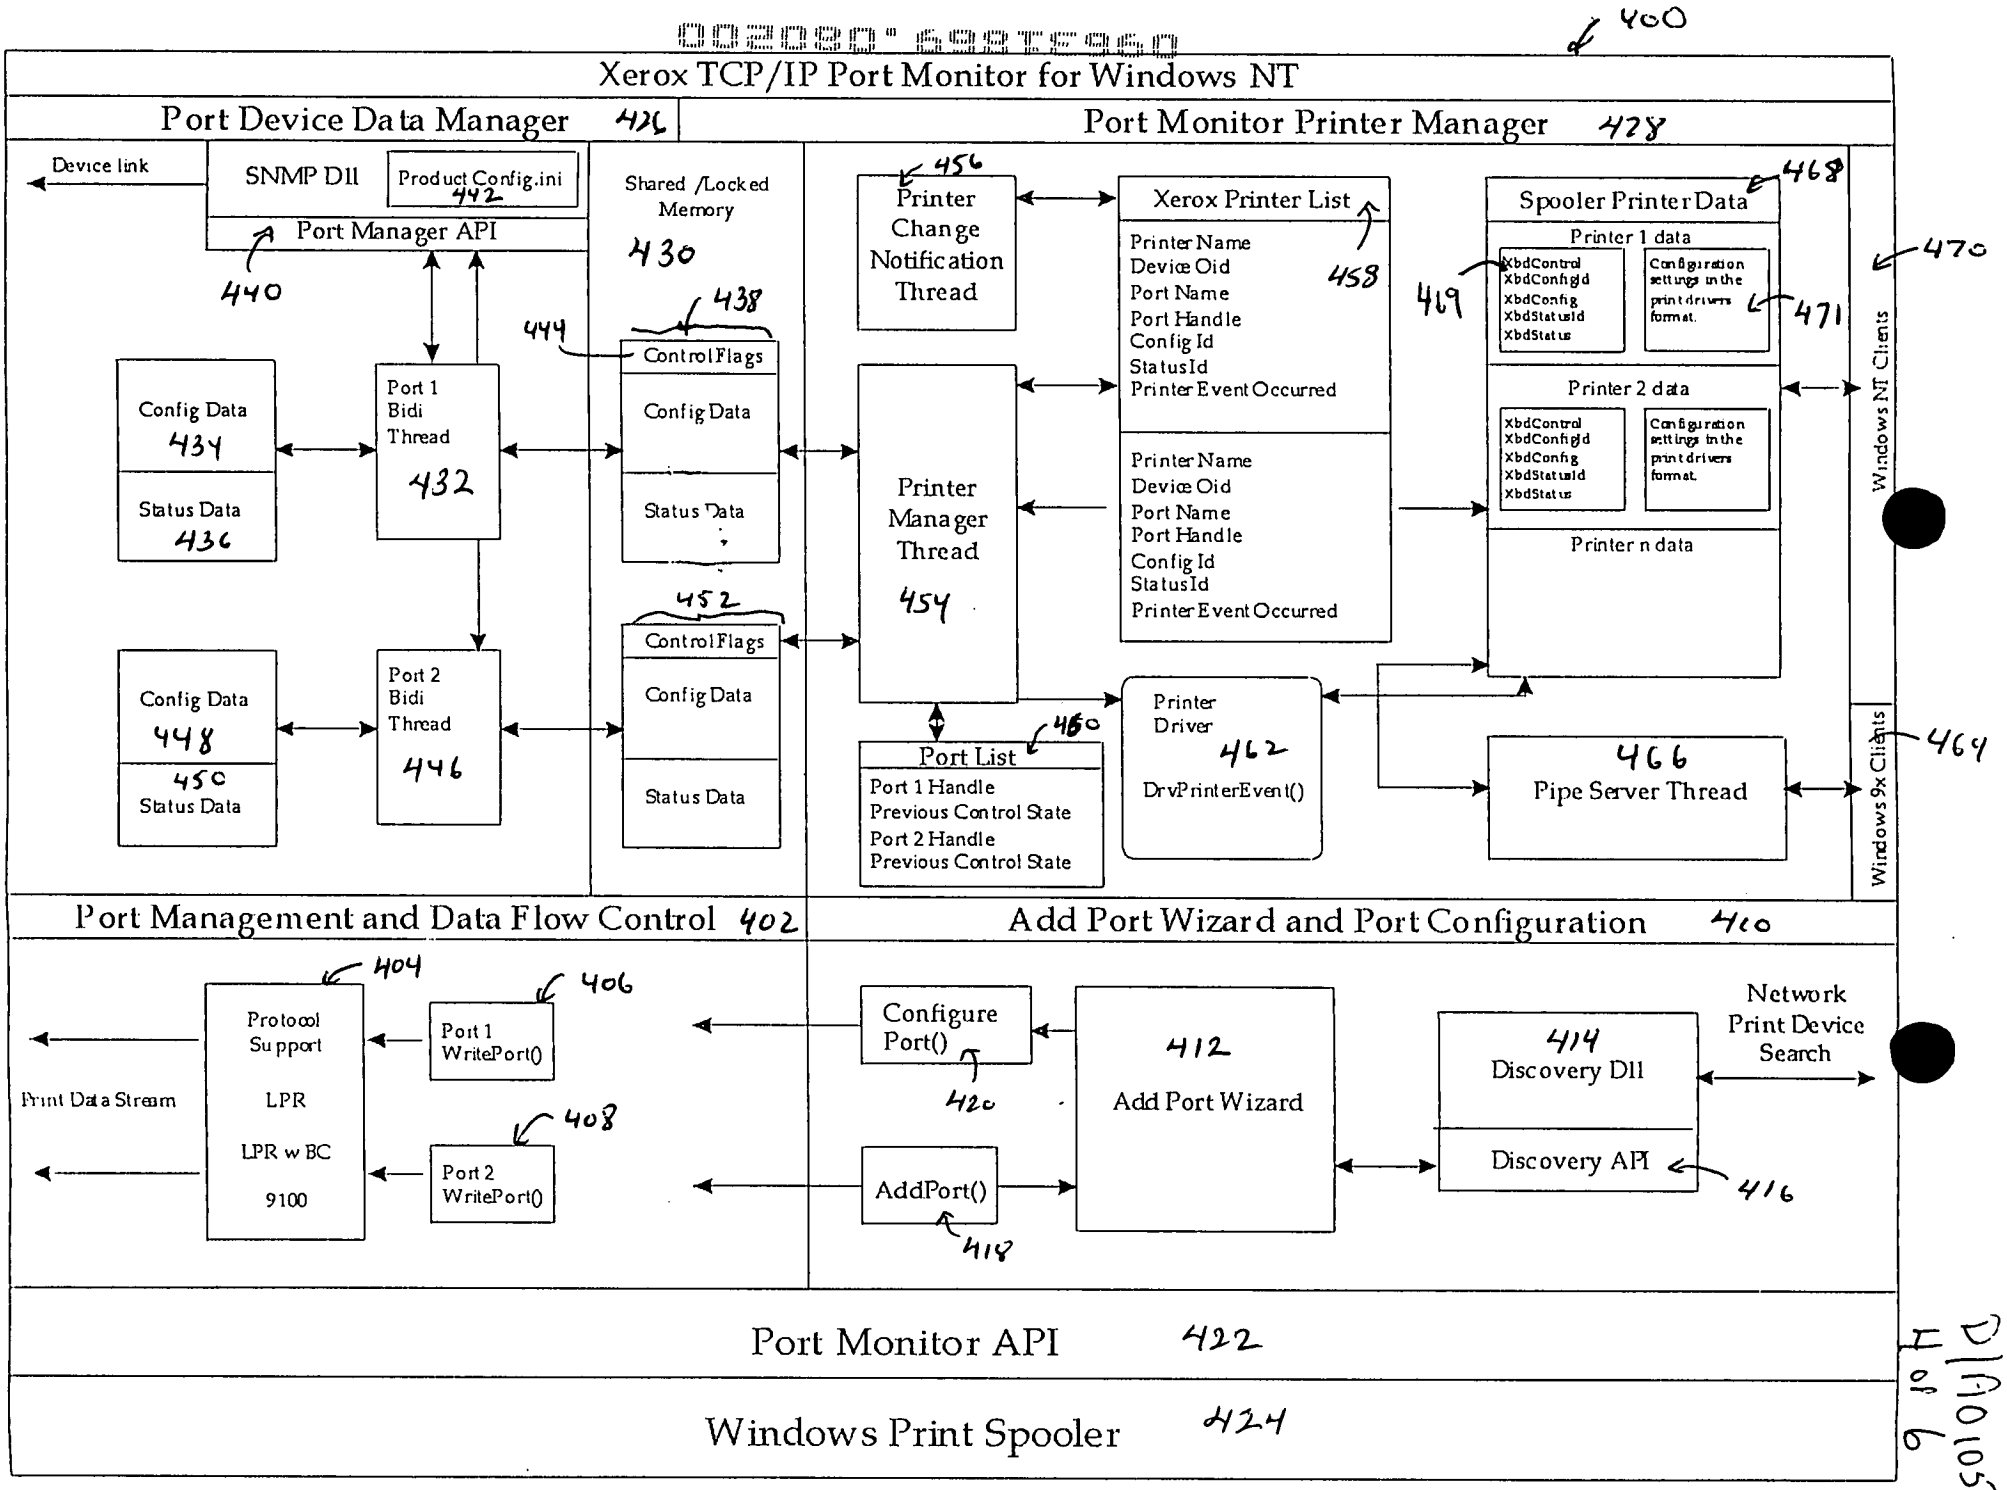

Fig 4

D/90105
Fig 6

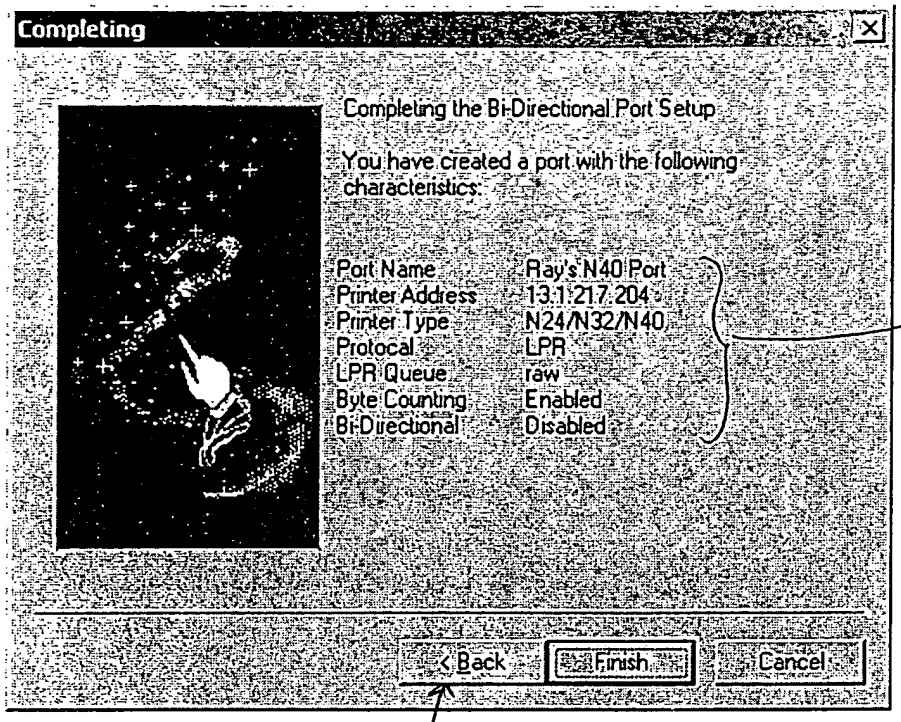

Fig 5

0 9 0 4 0 3 - 0 0 0 2 0 2 0 0

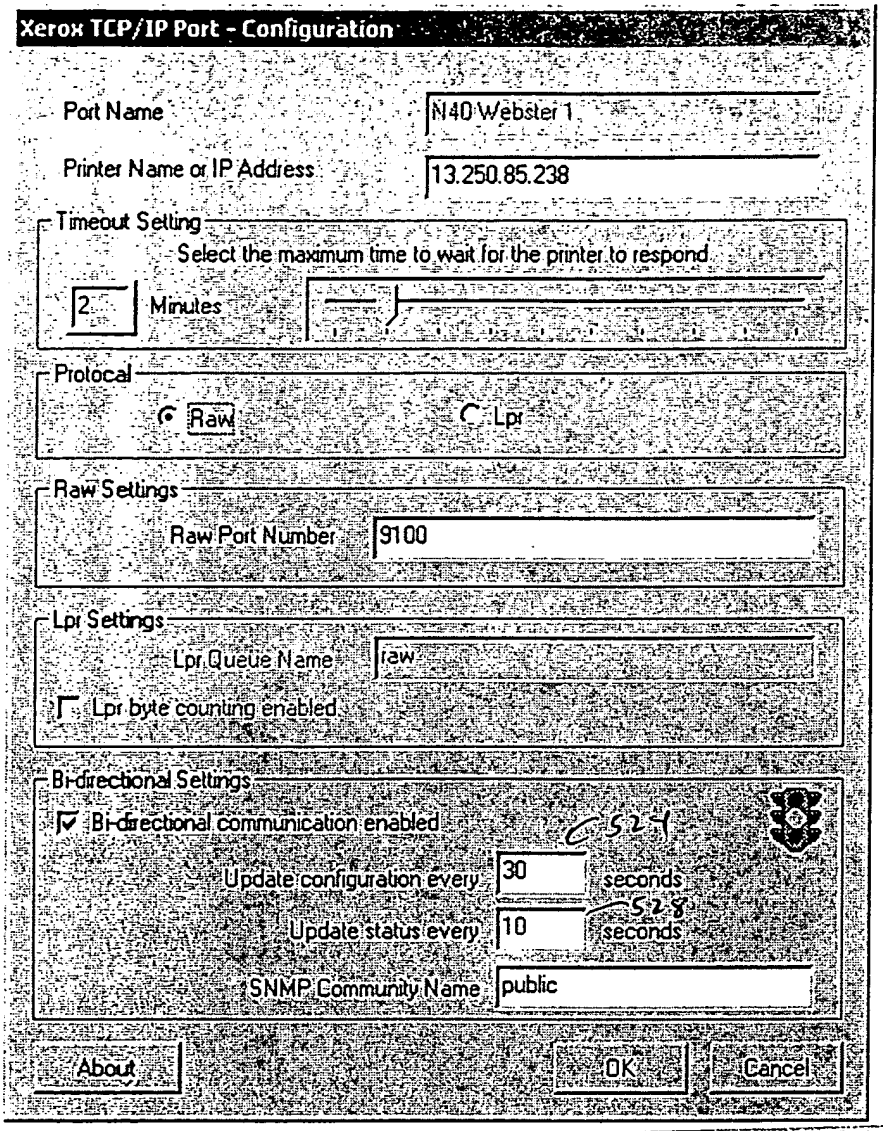
Xerox TCP/IP Port - Configuration
Port Name
N40 Webster 1
Printer Name or IP Address
13.250.85.238
Timeout Setting
Select the maximum time to wait for the printer to respond
2
Minutes
Protocal
Raw
Lpr
Raw Settings
Raw Port Number
9100
Lpr Settings
Lpr Queue Name
raw
Lpr byte counting enabled
Bi-directional Settings
Bi-directional communication enabled
Update configuration every
30
seconds
Update status every
10
seconds
SNMP Community Name
public
About
OK
Cancel
516
520
524
528

Fig 6